

7077

NEW




Fahrgerüst

mit Traverse/Ausleger

Light weight class: Maximum safety combined with light weight. Highly stable thanks to the cross-beam or stabiliser. Spacious, weatherproof platform with non-slip surface. With four height-adjustable swivel castors.

Features:

- **Work platform: 2.08 × 0.61 m**
- **Castors: Ø 150 mm**
- **Permissible load: 200 kg/m² (2.0 kN/m²)**

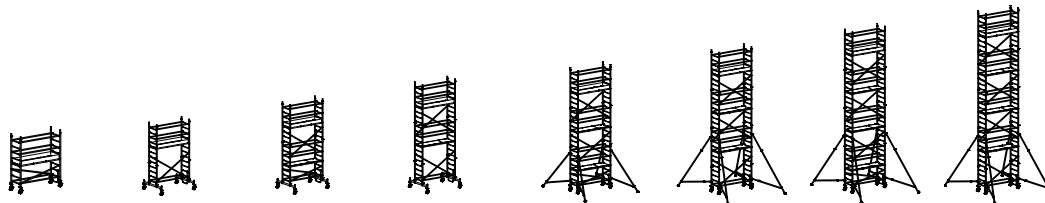

Reach height (approx. m)	3.27	4.42	5.42	6.42	7.27	8.27	9.27	10.27
Tower height (approx. m)	2.49	3.64	4.64	5.64	6.49	7.49	8.49	9.49
Standing height (approx. m)	1.27	2.42	3.42	4.42	5.27	6.27	7.27	8.27
Platform length (approx. m)	2.08	2.08	2.08	2.08	2.08	2.08	2.08	2.08
Frame section width (approx. m)	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72

Ballasting

Indoor, centre (kg)	100	40	60	120 ⁽²⁾	0	0	0	100
Indoor, on wall (kg)	100 ⁽¹⁾	80 ⁽¹⁾⁽³⁾	130 ⁽¹⁾⁽³⁾	200 ⁽¹⁾⁽³⁾	150 ⁽¹⁾	160 ⁽¹⁾	190 ⁽¹⁾	220 ⁽¹⁾
Outdoor, centre (kg)	120	40	100	160 ⁽²⁾	0	0	0	100
Outdoor, on the wall (kg)	120 ⁽¹⁾	80 ⁽¹⁾⁽³⁾	140 ⁽¹⁾⁽³⁾	220 ⁽¹⁾⁽³⁾	210 ⁽¹⁾	240 ⁽¹⁾	0 ⁽⁴⁾	0 ⁽⁴⁾
Order no.	707703	707704	707705	707706	707707	707708	707709	707710

⁽¹⁾ Ballasting is not required when two wall connectors (707241) are used.

⁽²⁾ Two connecting tubes (707143) are required for installing the ballast.

⁽³⁾ One connecting tube (707143) is required for installing the ballast.

⁽⁴⁾ Two wall connectors (707241) are required.

Required additional parts from page 23.

Individual parts and parts list can be found in the instructions for assembly and use on page 3. | [Click here.](#)